



# Samsung Galaxy S4 Disassembly

Simple instructions to disassemble a Samsung Galaxy S4

Written By: AhsAlexFerguson



## INTRODUCTION

Simple instructions to disassemble a Samsung Galaxy S4

---



### TOOLS:



- [Plastic Knife\(Fingernail\),Screwdriver](#) (1)
-

## Step 1 — The Back



- Peel off back of phone


## Step 2 — Battery

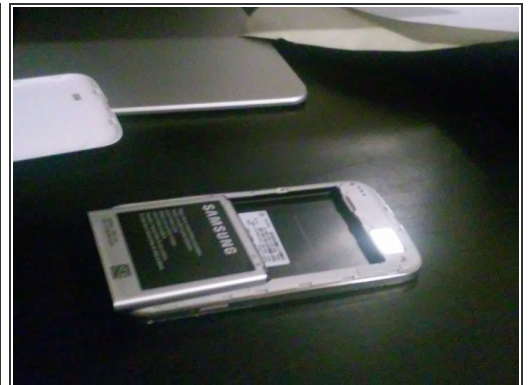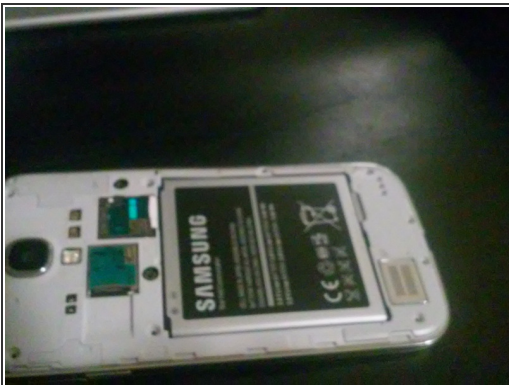

- Remove battery CAREFULLY




### Step 3

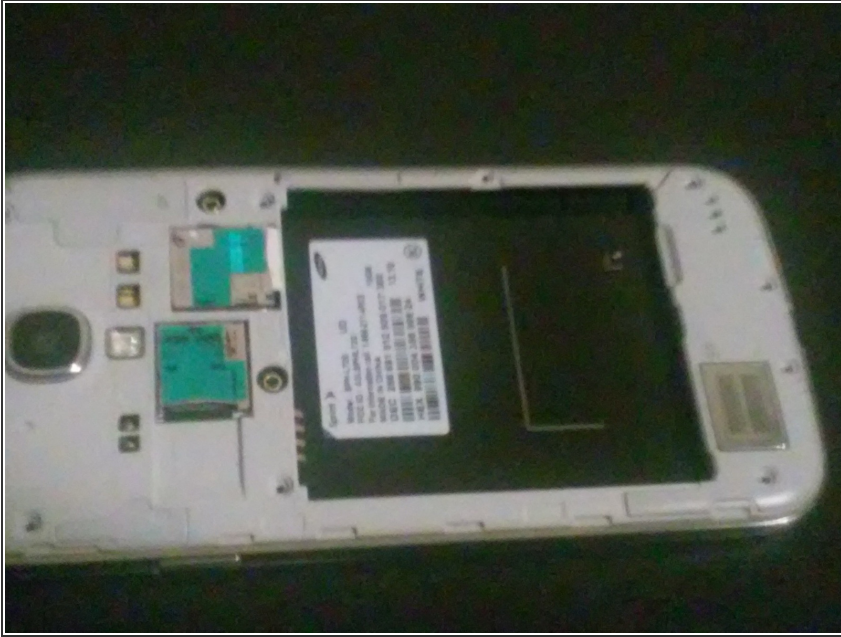


- Remove screws

### Step 4 — Speaker

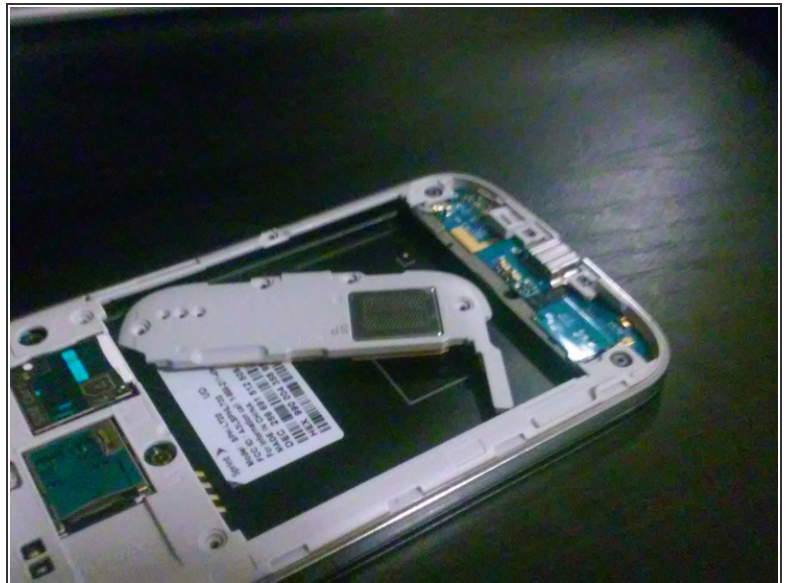


- Remove Speaker

## Step 5 — Clips

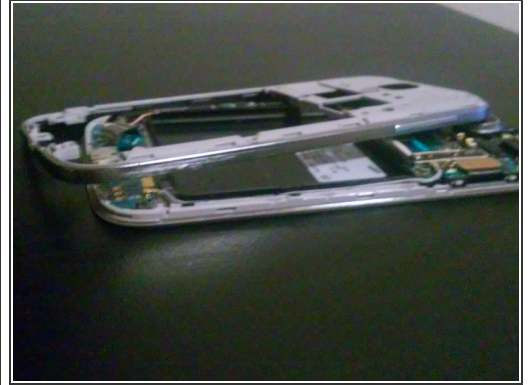

- Release clips on the outer rim

## Step 6 — Clamp

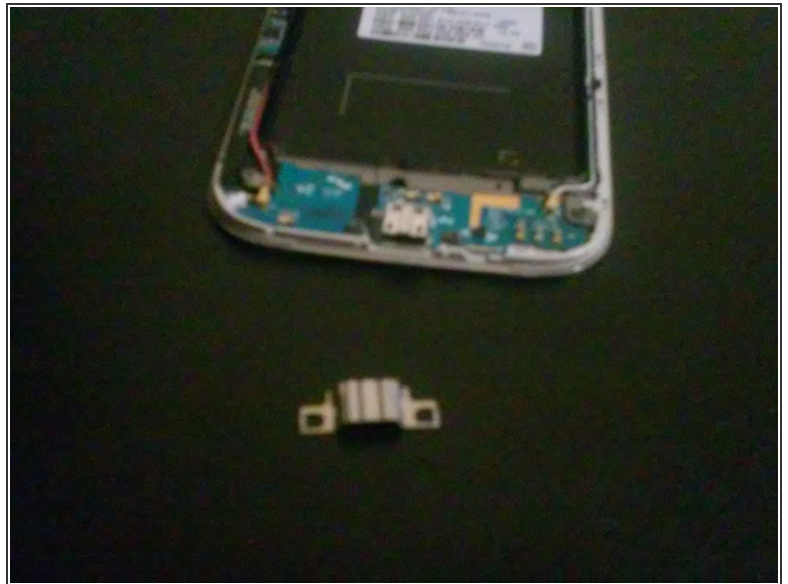

- Remove clip off of USB port with a flathead screwdriver.




## Step 7 — 3G and GSM antenna flex cable



- Use a plastic knife or flathead screwdriver to gently unplug the cable.


## Step 8 — Touch and Homscreen Flex Cable

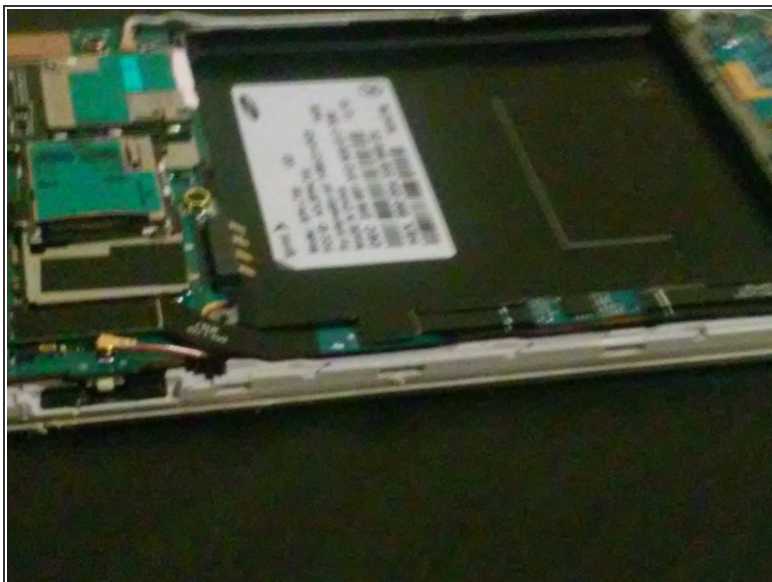

- Use your flathead screwdrive to carefully detach the Touch and Homscreen Flex cable



## Step 9 — Another Flex Cable

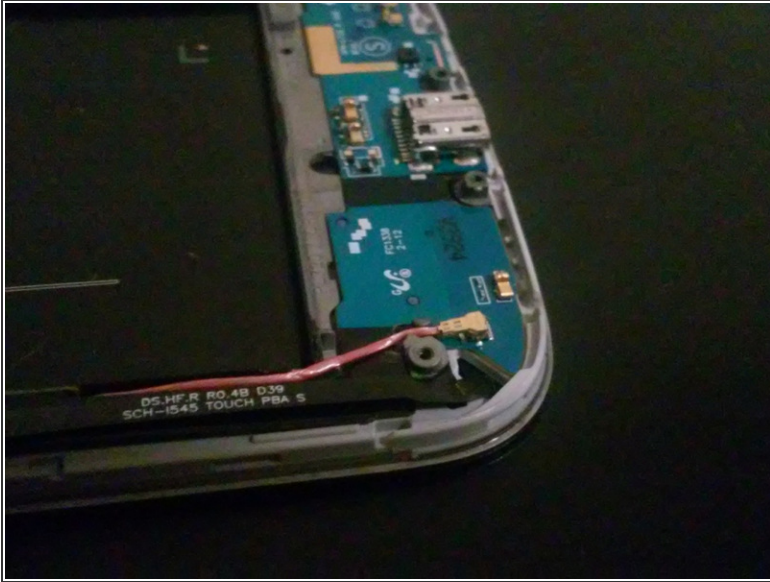


- Remove the cable

## Step 10 — Flex Cable



- Detach the flex cable

## Step 11 — Flex cable

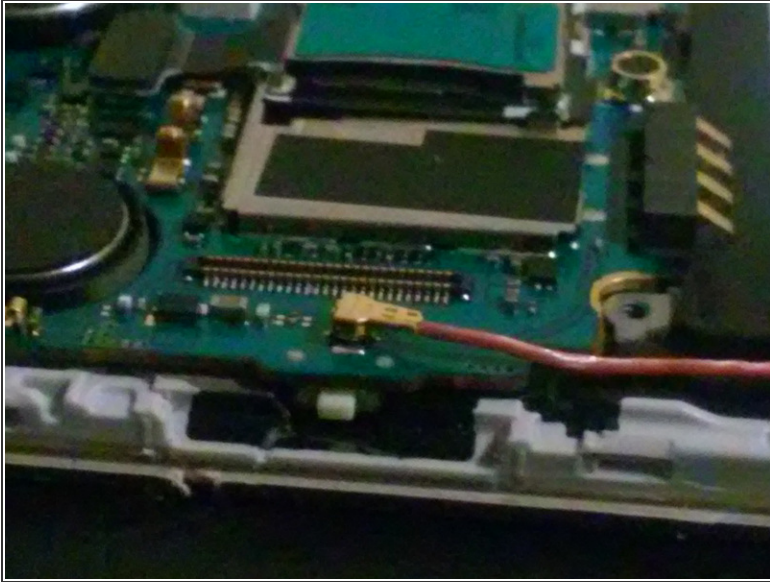

- Completely remove the flex cable

## Step 12 — USB PORT



- Remove the usb complete port



## Step 13 — 3G and GSM antenna flex cable



- Remove the 3G and GSM antenna cable from the motherboard.

## Step 14 — Port



- Lift ports from motherboard




## Step 15 — Detach



- Detach this port from the motherboard


## Step 16 — Screen cable

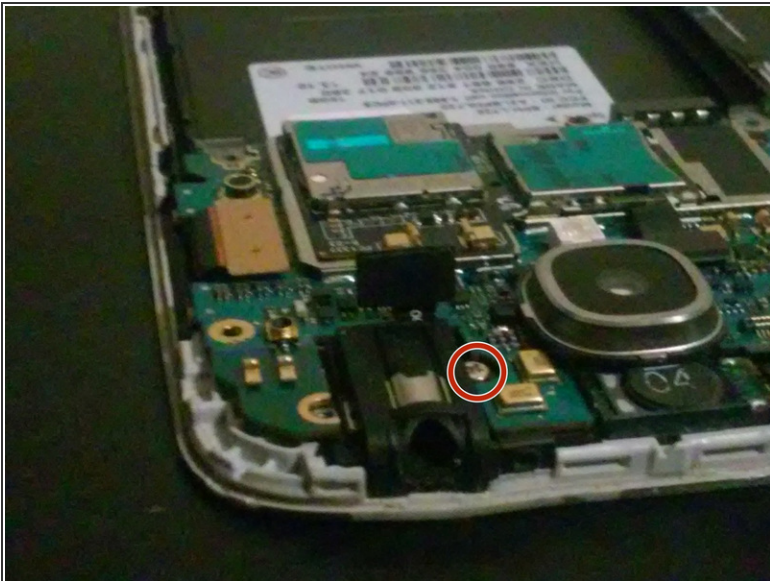

- Disconnect main screen cable
- Don't forget to remove this screw.



## Step 17 — Motherboard

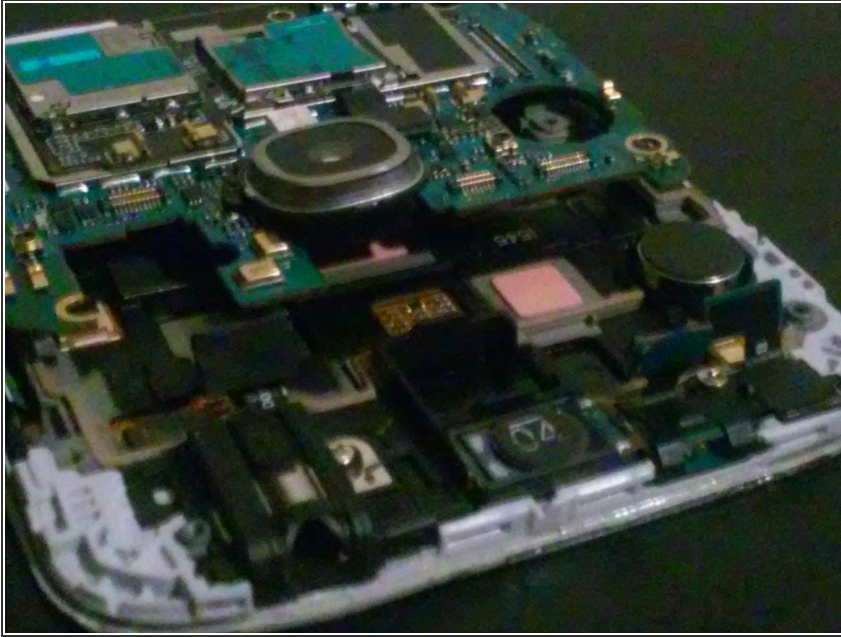

- Now you can take off the motherboard

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 03:22:02 PM.